



REPLACEMENT BALLY DOORCAP ORDER FORM

Please provide all information listed below.
 Email it to **parts@ballync.com** or **parts@ballypa.com**
 Fax it to Morehead City, NC **(252) 240-0871**
 Fax it to Bally, PA **(610) 702-2211**

If you have any questions call **800-242-2559** or **800-344-9302**.

Name:		Business Name:	
Address:		Phone:	
City:		Fax:	
State:	Zip:	Email:	

IF THE DOOR CAP YOU ARE REPLACING IS NOT A BALLY DOOR USE THE ADAPT-A-DOOR ORDER FORM. USE THESE STEPS AND THE DIAGRAM ON THE NEXT PAGE TO HELP YOU FILL IN INFORMATION.


INSTRUCTIONS

1. A - The exterior width of the door.
2. B - The overall thickness of the door.
3. C - The height of the door cap from top to bottom; outside to outside excluding the wiper gasket.
4. D - The height of the door including the bottom wiper gasket.
5. E - The location of the door closer measuring from the hinge side of the door.
6. F - The location of the top hinge measuring from the top of the door to the center of the door hinge.
7. G - From the center of the middle hinge to the bottom of the door.
8. H- From the center of the bottom hinge to the bottom of the door.
9. I - From the center of the latch to the bottom of the door.
10. Select the finish of the door.
11. Select the swing of the door (*facing the door, what side of the door are the hinges on?*)
12. Optional add-ons if needed (*if they are not marked they will not be on the door*).
13. Model and serial number (*Step inside of the unit turn around face the door frame there should be a tag by the vapor-proof light with this information.*)

****NOTICE: OPEN PACKAGE AND INSPECT DOOR FOR DAMAGE!
 NOTE ANY DAMAGE ON CARRIER RECEIPT BEFORE SIGNING!!!**

Serial #:

Model #:

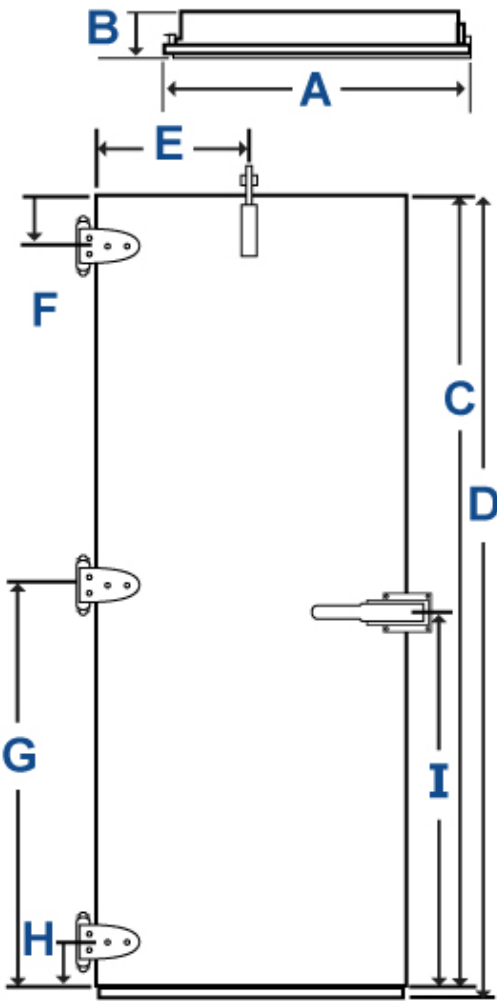

DIMENSIONS

A:

B:

C:

D:

E:

F:

G:

H:

I:

REQUIREMENTS

Finish (Choose one):

- 22 Gauge Stainless Steel (Standard)
- 20 Gauge Stainless Steel (Heavy Duty)
- 18 Gauge Stainless Steel (Super Duty)
- Embossed Aluminum
- Embossed White Galvanized
- Smooth White Galvanized
- Smooth White Aluminum
- Embossed Galvalume

Swing (Choose one):

- Right (Hinges on the right side)
- Left (Hinges on the left side)

COMMENTS:

OPTIONS

- Hardware (hinges & latch)
- Door Closer
- Kickplate (Choose one of each):
 - 1/8" Diamond Tread
 - Stainless Steel
 - Rigidized Stainless Steel

Does Existing Door have an Alarm?
 Yes No

- Interior only
- Exterior only
- Both

The following options require a power cord.

- Observation Window (Standard 14x14)
 (Circle one): Interior OR Exterior Crossover Cord
- Pressure Relief Port
 (Circle one): Interior OR Exterior Crossover Cord

Note: Hardware Is Not Mounted By Bally. Must Be Mounted In Field. 1/4 - 20 Tap & 13/64 Drill Bit Is Required.